

4" 95 PR6 95 PRX6 95 PRG6




CARATTERISTICHE IDRAULICHE - HYDRAULIC PERFORMANCES

Q= Portata - Capacity - Debit **50 Hz n= 2900 min**

Tipo Type	Power		V230 Single Phase		V400 Three Phase A	H(m)	0	40	60	80	100	120	140	160	
	kW	HP	A	µF			l/min	l/sec	l/min	l/min	l/min	l/min	l/min	l/min	l/min
							m ³ /h	0	0,67	1	1,33	1,67	2	2,33	2,67
95 PR6 N/04	0,55	0,75	4,9	20	1,7	26	24	23	22	20	17	14	10		
95 PR6 N/06	0,75	1	6,5	30	2,2	38	36	34	32	30	26	21	14		
95 PR6 N/09	1,1	1,5	9,4	40	3	57	53	51	48	44	39	32	21		
95 PR6 N/12	1,5	2	11,5	50	4	77	71	68	65	59	52	42	29		
95 PR6 N/17	2,2	3	14,7	75	5,7	109	101	97	92	84	73	60	41		
95 PR6 N/23	3	4	-	-	7,4	147	136	131	124	113	99	81	55		
95 PR6 N/31	4	5,5	-	-	10	198	184	176	167	153	134	110	74		
95 PR6 N/42	5,5	7,5	-	-	13,5	268	249	239	226	207	181	149	100		
95 PR6 N/56	7,5	10	-	-	18	358	332	319	302	276	241	198	134		

DIMENSIONI D'INGOMBRO E PESI - OVERALL DIMENSIONS AND WEIGHTS

Type	A mm Single Phase V 230	A mm Three Phase V 400	B mm	C mm Single Phase V 230	C mm Three Phase V 400	M Kg Single Phase	M Kg Three Phase	P Kg
95 PR6 N/04	667	647	330	337	317	8	8	3
95 PR6 N/06	752	727	390	362	337	10	10	4
95 PR6 N/09	872	842	480	392	362	12	12	5
95 PR6 N/12	992	962	570	422	392	13	13	6
95 PR6 N/17	1187	1172	720	467	452	15	15	8
95 PR6 N/23	-	1457	900	-	557	-	19	10
95 PR6 N/31	-	1737	1140	-	597	-	22	13
95 PR6 N/42	-	2168	1470	-	698	-	27	16
95 PR6 N/56	-	2708	1890	-	818	-	32	21

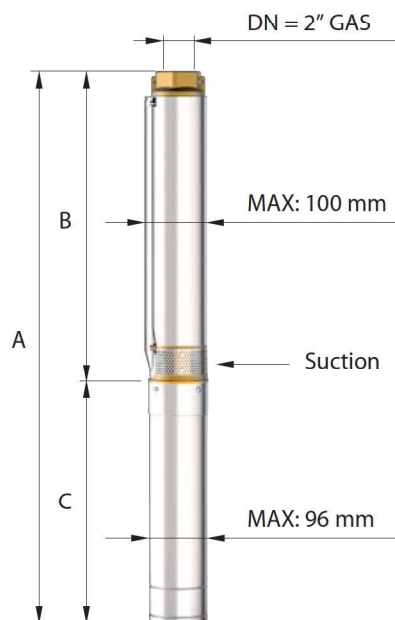

Versioni disponibili
Available versions
Versions disponibles
Versiones disponibles



95 PR
Gabbia di aspirazione e mandata in ottone
Suction cage and delivery bowl in brass



95 PRX
Gabbia di aspirazione e mandata in AISI 304 microfuso
Suction cage and delivery bowl in AISI 304 casted



95 PRG
Gabbia di aspirazione e mandata in ghisa con trattamento di cataforesi
Suction cage and delivery bowl in cast iron with CED (Cathode Electro Deposition)


n% = Rendimento della pompa
n% = Rendement de la pompe
n% = Pump efficiency
n% = Rendimiento de la bomba

Max 65%

kW/st = Assorbimento per stadio
kW/st = Absorption par étage
kW/st = Stage absorption
kW/st = Potencia absorbida por etapa

Max 0,128

Tolleranze secondo UNI ISO 9906 livello 3B - Tolerances according to UNI ISO 9906 grade 3B

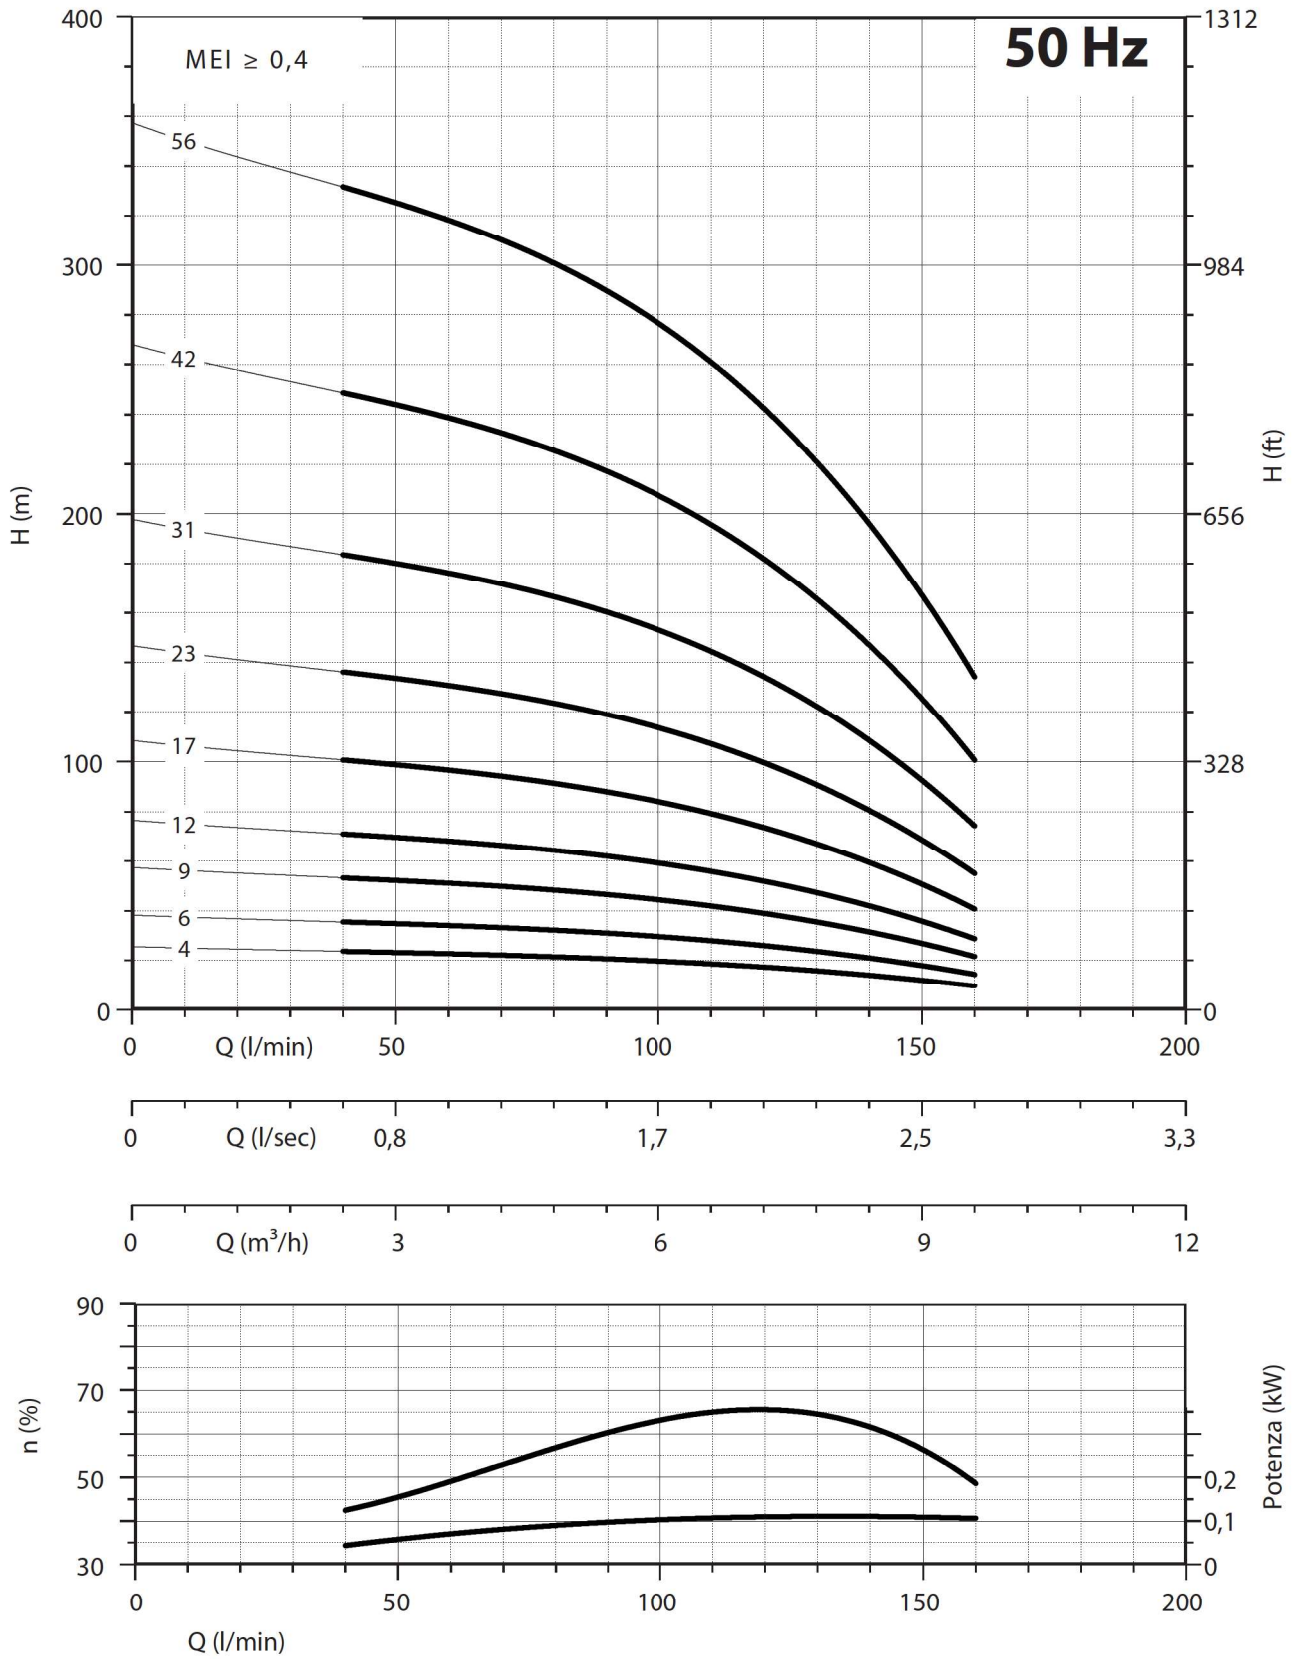

NPSH (m)			25%	50%	75%	100%
95 PR 6	95 PRX 6	95 PRG 6	2,2	2,2	2,7	3,5